

Hollywood Racks F10 Elevator Rack Instructions

When using your Elevator Rack, always remember the following points:

- Install this rack on structurally sound boot lids and/or bumpers only.
- **Never** install upper hooks to plastic, glass or fiberglass.
- Clean surface of the boot lid and bumper prior to installation.
- Tighten all straps both before and after placing bikes on the rack.
- Never place more than 45kg / 100 lbs. on the Elevator Racks.
- Use at least 2 tie-down straps or shock (bungee) cords for each bike when securing bikes to rack.
- Keep bicycle tires at least 30cm away from the exhaust pipe of the vehicle.
- Check the rack, bikes and strap tension regularly during use.
- Drive slowly when on bumpy or dirt roads.

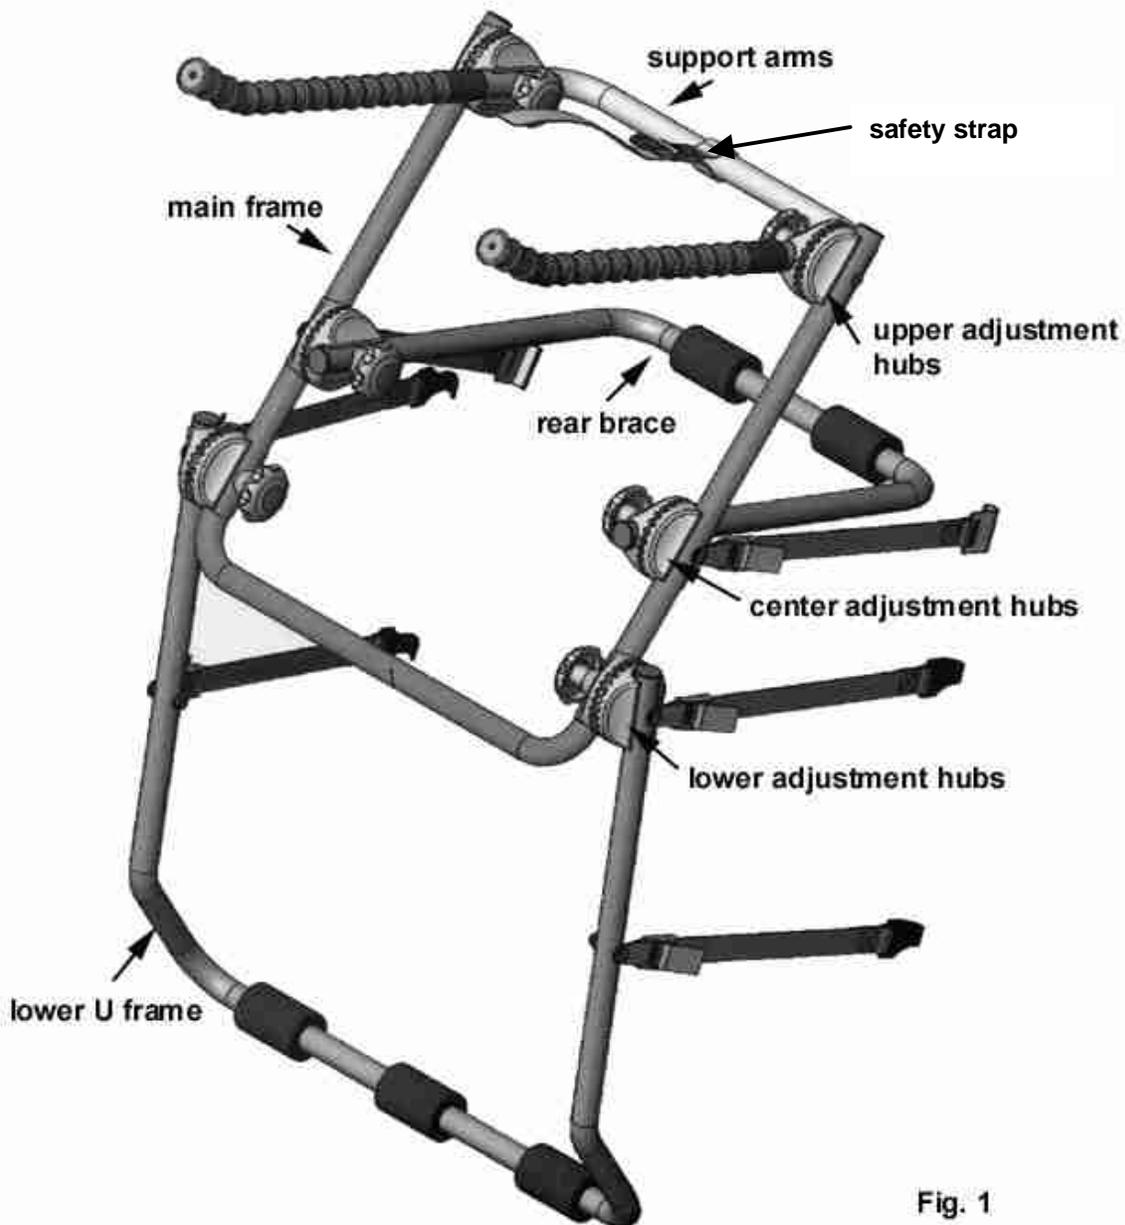


Fig. 1

1. Installing the Hollywood Elevator Rack on your vehicle:

After removing the Elevator Rack from the box, rotate the lower U frame such that it aligns with the main frame approximately as indicated in Fig. 1. Use the lower adjustment hubs & knobs.

- A. Place the rack on the vehicle's bumper so that the rack is perpendicular to the ground. Rotate and position the rear brace of the rack such that it rests on the boot lid or rear door of the vehicle. The main frame should remain in a mostly vertical position. Now, tighten the center adjustment hubs.
- B. Attach the upper straps to the top of the boot lid, hatch, rear door, or roof rack cross bar. Pull the loose strap end and tighten the strap securely. Place the lowest strap) under the bumper or at the bottom edge of the rear door. Pull down on the straps to tighten. Install the center (side) straps horizontally from the rack to the boot lid or rear door. Pull ends to tighten securely, and tie off extra strap length so the end of the strap will not get caught on anything, or drag on the ground.
- C. Raise the bicycle support arms such that they are parallel to the ground or angled just slightly upward. You may need to loosen the upper set of knobs.



Fig. 2

3. Installing the bicycles on the F10 Elevator Rack

A. The heaviest bike should be loaded on first closest, the lightest on the outside. Place the first bicycle on the support arms closest to the main frame (2.) of the rack. The handlebars of the first bike should be on the passenger's side of the vehicle. Rotate the crank arm so that the pedal does not contact the vehicle. Thread the tie down strap (not pictured) around the main frame, and through the buckle. Tighten the strap securely. Adjust the other tie down strap accordingly.

B. Install the 2nd bicycle with the handlebars on the opposite side of the first bicycle. Adjust the ties down straps as per the above instructions.

C. Use the nylon safety strap (attached to the support arms) to help secure the bicycles to the rack. This strap must be routed behind the main frame of the rack and through the bicycles. **Be sure to tighten all straps both before and after mounting bicycles on the rack! Be sure all knobs are tight before driving the vehicle!**

Tip: Women's, children's and/or small frame bicycles can be mounted on the rack by placing the bicycle on the support arms under the down tube and behind the seat tube (under the seat stays).

4. Removing and storing the F10 Elevator rack:

Remove bicycles and tie down straps from the rack. Loosen the upper knobs and lower the bicycle support arms. Lift up on the release tabs of the buckles and unhook the straps from the bumper or rear door. Remove the rack from the vehicle. Loosen the middle knobs and fold the rear brace forward. Loosen the lower knobs, and fold the lower "U" frame back against the main frame. Tighten all knobs to keep the F10 Elevator rack in a tightly folded position until further use is required.

Limited Lifetime Warranty (effective January 1, 2008):

Hollywood Racks will warrant its car racks and accessories during the time that an original retail purchaser owns the product subject to the exclusions and limitations of this warranty. Hollywood Racks will remedy defects in materials and workmanship by repairing or replacing (at its option) a defective part or the complete rack without charge for labor or parts. Hollywood Racks may elect (at its option) to issue a refund equal to the purchase price paid for the product. This warranty does not cover problems caused by normal wear and tear including (but not limited to) weather, scratches, dents, rust, accidents, unlawful vehicle operation, misuse, abuse, neglect, theft, unauthorized modifications, or unauthorized repair. No warranty is given for defects resulting in incorrect assembly, incorrect installation onto the vehicle, incorrect attachment of bicycles onto the rack, or overloading of the rack's weight restrictions. This warranty terminates if the original retail purchaser transfers the product to any other person. If a product is believed to be defective, the original retail purchaser should contact either the original retailer.

Disclaimer of Liability: Repair or replacement of a defective product or the issuance of a refund or credit (as determined by Hollywood Racks) is a purchaser's exclusive remedy under this warranty. Damage to a purchaser's vehicle, cargo, bicycles and or to any other person is excluded. This warranty is expressly made in lieu of any and all other express warranties, whether oral or written. Hollywood Racks shall not be liable for any direct, indirect, consequential, incidental, special, punitive or any other damages in connection with the purchase, use or handling of this product.

Hollywood Racks
12812 South Spring Street Los Angeles, CA 90061 USA
Tel (310) 516-8600 Fax (310) 516-8955
Customer Service Hours: M-F 7:00 AM - 3:00 PM Pacific Standard Time
info@hollywoodracks.com www.hollywoodracks.com

Made in Taiwan 110508 Rev C